FREEDOM OF INFORMATION

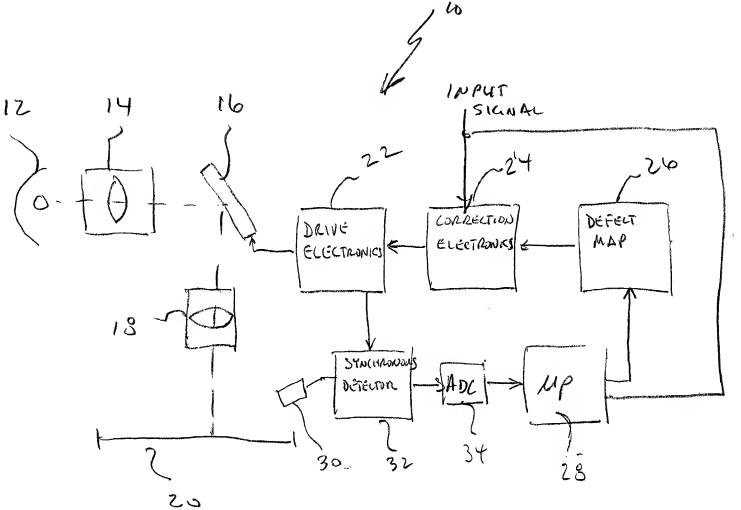

FIG. 1

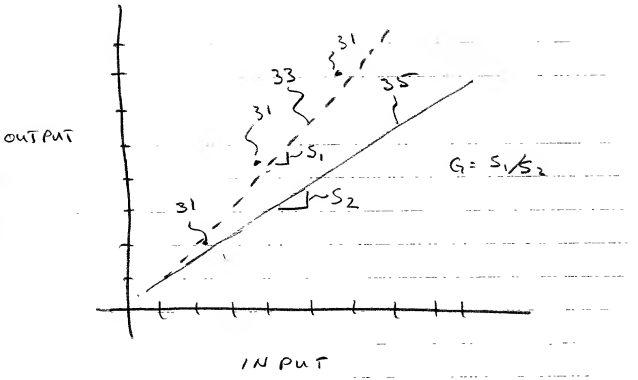

FIG 2.


CREATE DEFECT MAP
36
CORRECT INPUT SIGNAL ACCORDING TO MAP
38
DISPLAY CORRECTED INPUT SIGNAL
40

FIG. 3

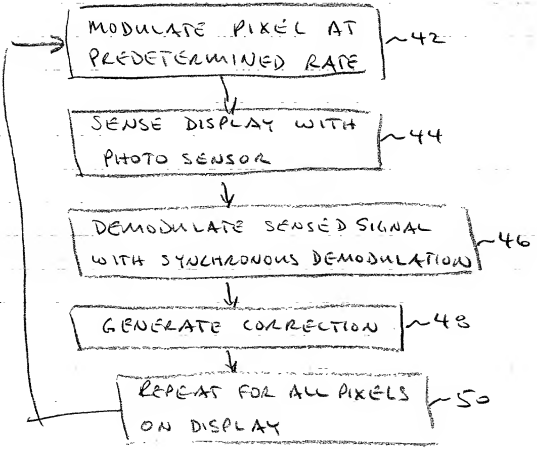
MODULATE PIXEL AT PREDETERMINED RATE
42
SENSE DISPLAY WITH PHOTO SENSOR
44
DEMODULATE SENSED SIGNAL WITH SYNCHRONOUS DEMODULATION
46
GENERATE CORRECTION
48
REPEAT FOR ALL PIXELS ON DISPLAY
50

FIG. 4